

QSDC-500-2000-50-30-S

0.5~2GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~2GHz
Insertion Loss:	0.4dB max.
Coupling:	30±1dB max.
Coupling Flatness:	±0.5dB max.
Directivity:	20dB min.
VSWR (Mainline):	1.2 max.
Average Power:	50W

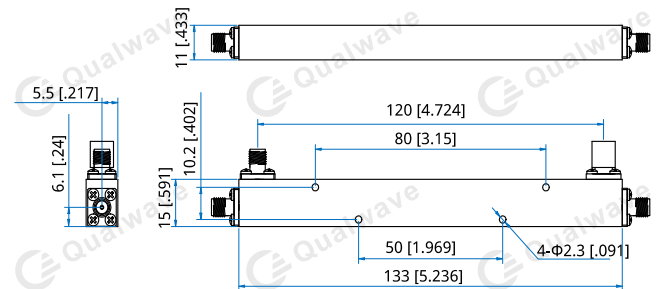
Mechanical

Size ^{*1} :	133*15*11mm 5.236*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QSDC-500-2000-50-30-S

Customization is available upon request.