

QSDC-910-920-K3-30-S

0.91~0.92GHz, 300W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.91~0.92GHz
Insertion Loss:	0.2dB max.
Coupling:	30±0.5dB
Coupling Flatness:	±0.2dB max.
Directivity:	20dB min.
VSWR:	1.2 max.
Average Power:	300W
Impedance:	50Ω

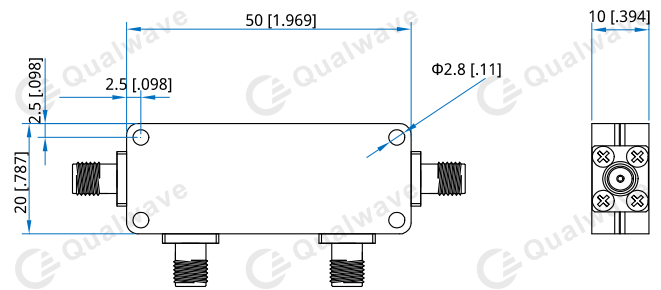
Mechanical

Size ^{*1} :	50*20*10mm 1.969*0.787*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+95°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

[QSDC-910-920-K3-30-S](#)

Customization is available upon request.