

# QPS16-6000-12000-A

## SP16T, 6~12GHz, Absorptive

Features:  
 \* Low Insertion Loss  
 \* High Isolation

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	6~12GHz
Insertion Loss:	5.2dB max.
Isolation:	80dB min.
VSWR:	1.8 max.
Input Power:	30dBm max.
Voltage/Current:	+5V@700mA max. -5V@100mA max.
Control:	TTL High - 1 TTL Low/NC - 0
Impedance:	50Ω

### Control True Table

E4	E3	E2	E1	Connection
0	0	0	0	J0 - J1 On
0	0	0	1	J0 - J2 On
0	0	1	0	J0 - J3 On
0	0	1	1	J0 - J4 On
0	1	0	0	J0 - J5 On
0	1	0	1	J0 - J6 On
0	1	1	0	J0 - J7 On
0	1	1	1	J0 - J8 On
1	0	0	0	J0 - J9 On
1	0	0	1	J0 - J10 On
1	0	1	0	J0 - J11 On
1	0	1	1	J0 - J12 On
1	1	0	0	J0 - J13 On
1	1	0	1	J0 - J14 On
1	1	1	0	J0 - J15 On
1	1	1	1	J0 - J16 On

### Mechanical

Size <sup>*1</sup> :	203.2*30*10.2mm 8*1.181*0.402in
Switching Time:	150ns max.
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Nickel plated aluminum
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

### How To Order


**QPS16-6000-12000-A**

Customization is available upon request.

### Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

### Outline Drawings

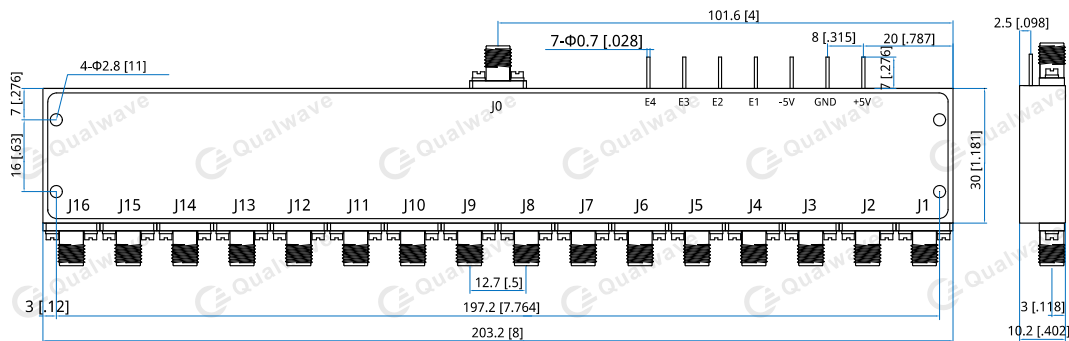

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]