

QRHA229

3.22~4.9GHz, WR-229

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 3.22~4.9GHz
Gain: 10, 15, 20dB
VSWR: 1.2 max. (Outline A, B, C)
1.4 max.


Mechanical

Interface: WR-229 (BJ40)
Flange: FDP40
Material: Aluminium

Environmental

Temperature: -55~+165°C

Outline Drawings

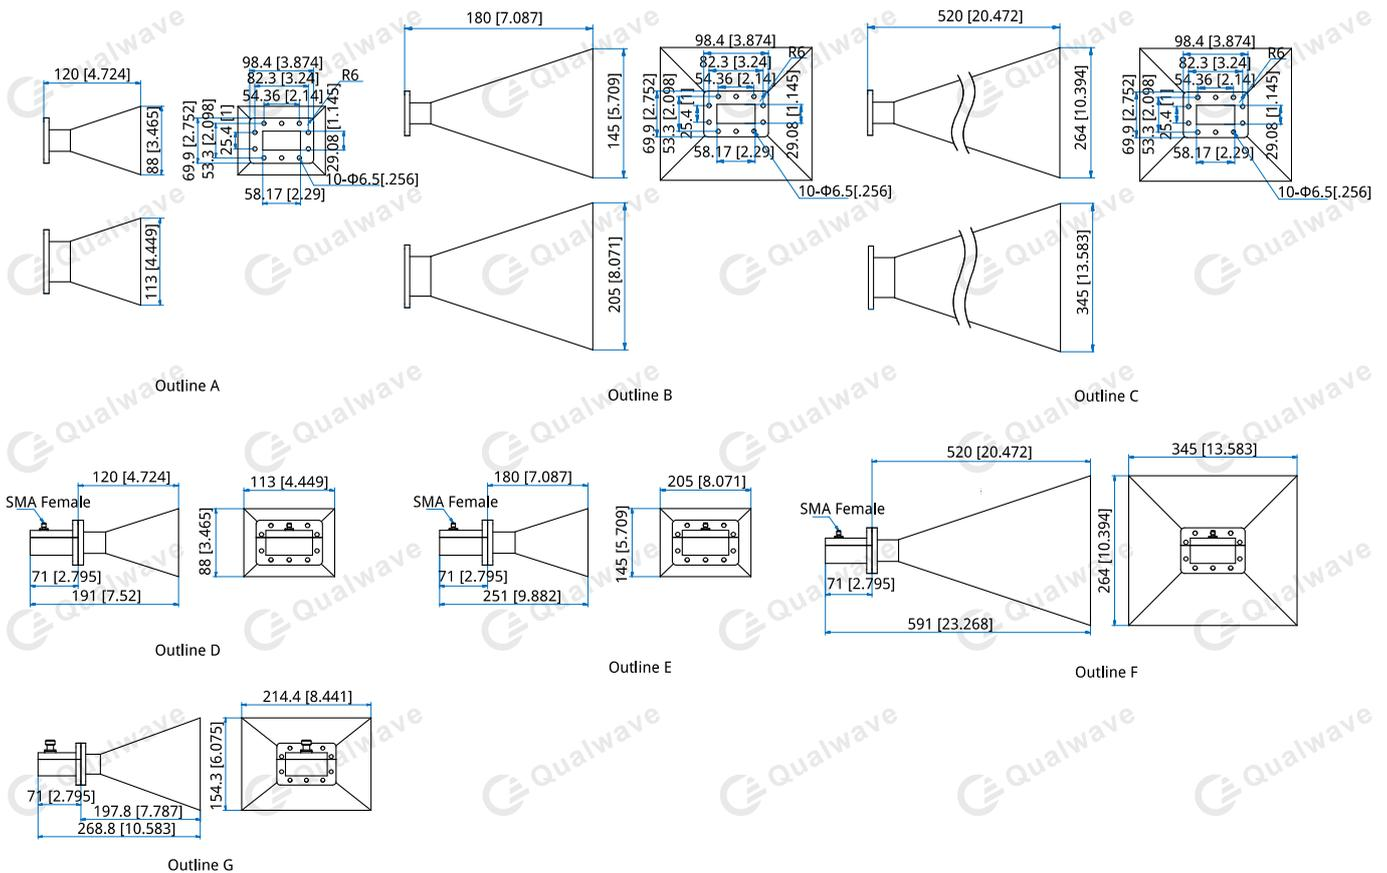

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Standard Gain Horn Antennas

How To Order

QRHA229-X-Y-Z

X: Gain in dB

10dB - Outline A, D

15dB - Outline B, E, G

20dB - Outline C, F

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female (Outline G)

S -SMA Female (Outline D, E, F)

Pannel Mount naming rules:

P - Pannel Mount

Examples:

To order an antenna, 3.22-4.9GHz, 15dB, WR-229, SMA female, specify QRHA229-15-S.

Customization is available upon request.