

QRHA34 21.7~33GHz, WR-34

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 21.7~33GHz
Gain: 10, 15, 20, 25dB
VSWR: 1.2 max.
1.35 max. (Outline E, F, G, H)


Mechanical

Interface: WR-34 (BJ260)
Flange: FBP260
Material: Brass

Environmental

Temperature: -55~+165°C

Outline Drawings

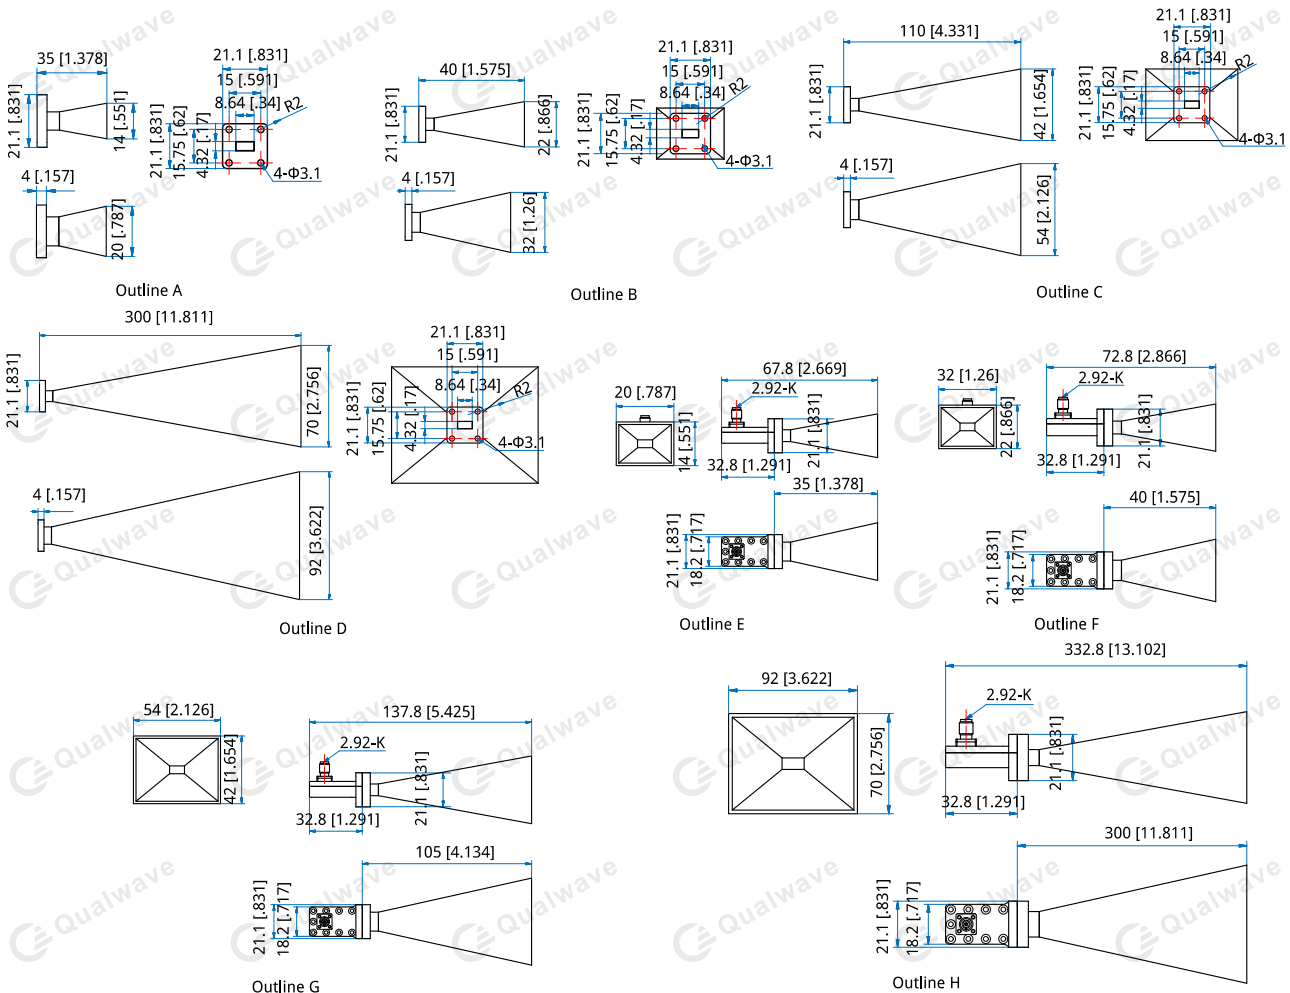

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Standard Gain Horn Antennas

How To Order

QRHA34-X-Y-Z

X: Gain in dB

10dB - Outline A, E

15dB - Outline B, F

20dB - Outline C, G

25db - Outline D, H

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

K - 2.92 mm Female (Outline E, F,G, H)

Pannel Mount naming rules:

P - Pannel Mount

Examples:

To order an antenna, 27.1-33GHz, 15dB, WR-34, 2.92 mm Female, specify QRHA34-15-K.

Customization is available upon request.