

# QRHA340

## 2.17~3.3GHz, WR-340

Features:  
\* Broadband

Applications:  
\* Wireless  
\* Transceiver  
\* Laboratory Test  
\* Broadcast

### Electrical

Frequency: 2.17~3.3GHz  
Gain: 10, 15dB  
VSWR: 1.4 max.


### Mechanical

Interface: WR-340 (BJ26)  
Flange: FDP26  
Material: Aluminium

### Environmental

Temperature: -55~+165°C

### Outline Drawings

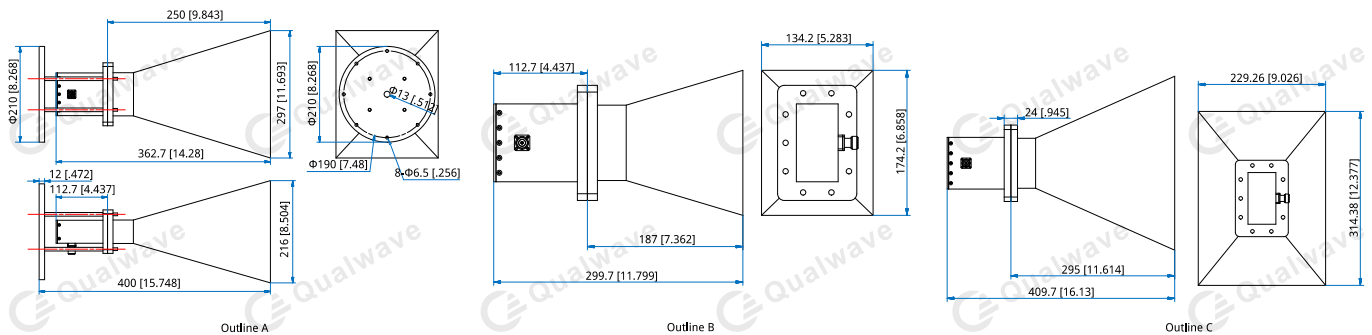

Unit: mm [in]      Tolerance: ±0.2mm [±0.008in]

### How To Order

#### QRHA340-X-Y-Z

X: Gain in dB

10dB - Outline B

15dB - Outline A, C

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female (Outline A, B, C)

S - SMA Female

Pannel Mount naming rules:

P - Pannel Mount (Outline A)

Examples:

To order an antenna, 2.17-3.3GHz, 15dB, WR-340, N Female, Pannel Mount, specify QRHA340-15-N-P.

Customization is available upon request.