QRHA510

1.45~2.2GHz, WR-510

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency:	1.45~2.2GHz
Gain:	15dB
VSWR:	1.4 max.

Mechanical

Interface:	WR-510 (BJ18)
Flange:	FDP18
Material:	Aluminium

Environmental

Temperature:	-55~+165℃

Outline Drawings

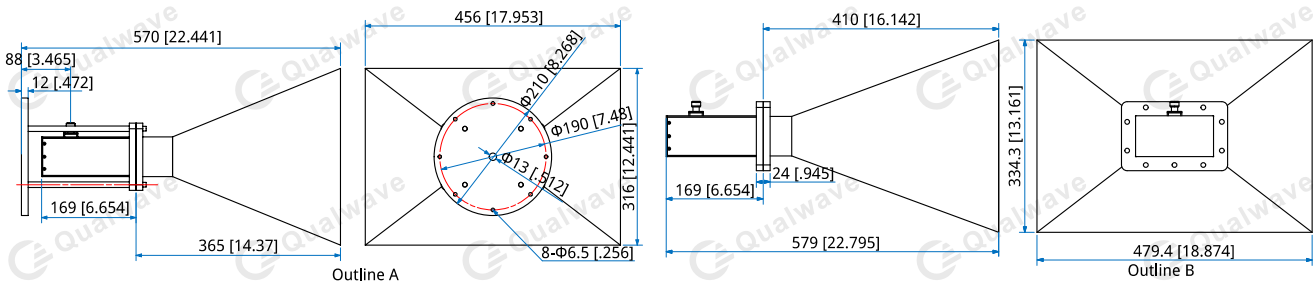

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]

How To Order

QRHA510-X-Y-Z

X: Gain in dB
15dB - Outline A, B
Y: Connector type if applicable
Z: Installation method if applicable

Connector naming rules:
N - N Female (Outline A, B)
S - SMA Female

Pannel Mount naming rules:
P - Pannel Mount (Outline A)

Examples:
To order an antenna, 1.45-2.2GHz, 15dB, WR-510, N Female, Pannel Mount, specify QRHA510-15-N-P.

Customization is available upon request.