

QSC12R3B

High Power, High Isolation

Features:
 * High Power
 * High Isolation
 * Low Insertion Loss
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Laboratory Test

Description

QSC12R3B series Surface Mount Circulators cover frequency range 1400~6000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Temperature (°C)
2496-2696	200	0.30	23.0	1.20	60	-40 ~ +85
3250-3450	200	0.35	20.0	1.25	30	-40 ~ +85
3300-3500	200	0.35	20.0	1.25	40	-40 ~ +85
3300-3800	500	0.60	18.0	1.30	60	-40 ~ +85
3400-4000	600	0.60	17.0	1.30	60	-40 ~ +85

Mechanical

Size: $\Phi 12.3 \times 7 \text{mm}$
 $\Phi 0.484 \times 0.276 \text{in}$

How To Order

QSC12R3B-W-X-Y-Z

W: Start frequency in MHz

X: Stop frequency in MHz

Y: Average power in W

Z: Direction type

Direction Naming Rules:

1 - Clockwise


2 - Anticlockwise

Examples:

To order a QSC12R3B series Circulator, 3.3~3.8GHz, 60W, Clockwise, specify QSC12R3B-3300-3800-60-1.

Customization is available upon request.

Outline Drawings

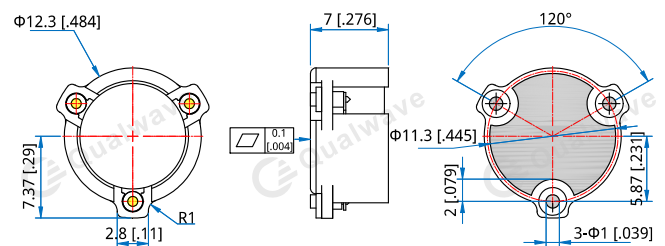

Unit: mm [inch]

Tolerance: $\pm 0.2 \text{mm}$ [$\pm 0.008 \text{in}$]