

QWCA-650-N

WR-650 to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 1.13~1.73GHz
VSWR: 1.2 max.

Mechanical

Coax Connectors: N
Waveguide Size: WR-650
Flange: FDP14
Material: Aluminium

How To Order

QWCA-650-X-Y-Z

X: Connector type.

Y: Configuration type.

Z: Flange type if applicable.

Connector naming rules:

N - N Male (Outline A)

NF - N Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

1 - FBP

2 - FDP (Outline A)

3 - FBM

4 - FDM

Examples:


To order a waveguide to coax adapter, WR-650 to N female, right angle, FDP, specify QWCA-650-NF-R-2.

Customization is available upon request.

Environmental

Operating Temperature: -70~+165°C

Outline Drawings

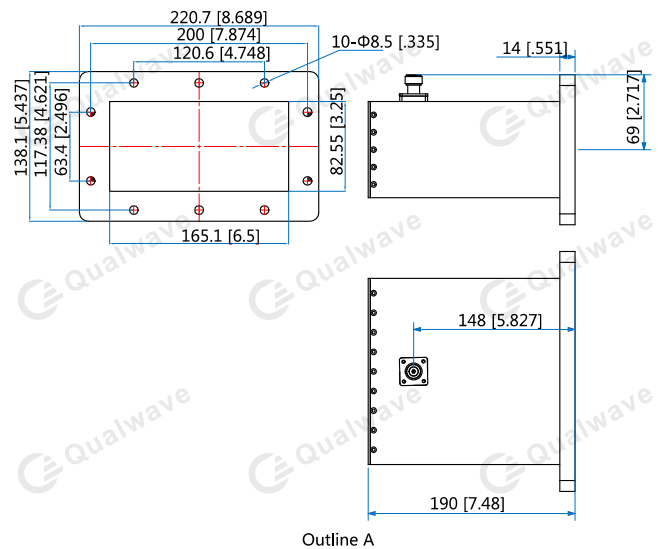

Outline A

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]