

2-Way Power Divider/Combiner

QPD2-1000-18000-20-S 2-Way, 1~18GHz

Features: * Small Size

* Low Insertion Loss

- Applications:
 - * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~18GHz
Insertion Loss:	1.2dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.4 max.
Isolation:	16dB min.
Amplitude Balance:	0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider
	1W max. as combiner

Mechanical


Size ^{*1} :	99*24*10mm
	3.898*0.945*0.394in
Weight:	65g
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

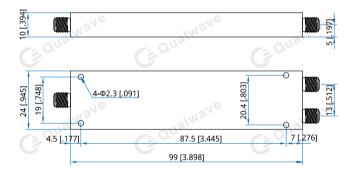

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

How To Order QPD2-1000-18000-20-S

Customization is available upon request.