

## QPD3-5-1000-50-S

### 3-Way, 0.005~1GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical


Frequency:	0.005~1GHz
Insertion Loss:	1dB max.
VSWR:	1.5 max.
Isolation:	12dB min.
Amplitude Balance:	0.3dB
Phase Balance:	5°
Power @SUM Port:	50W max. as divider 50W max. as combiner

#### Mechanical

Size <sup>*1</sup> :	60*80*22mm 2.362*3.15*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

#### Outline Drawings

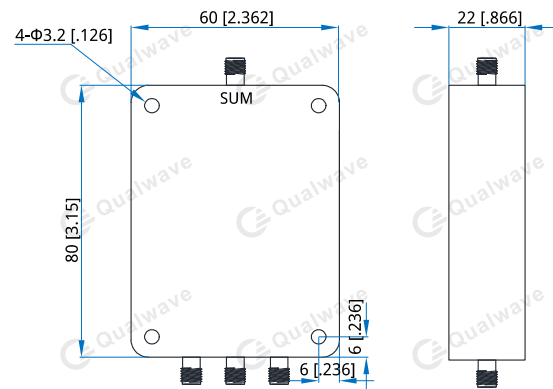

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD3-5-1000-50-S**

Customization is available upon request.