

4-Way Power Divider/Combiner

QPD4-2000-18000-20-S

4-Way, 2~18GHz

Features: * Small Size

* Low Insertion Loss

- Applications:
- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~18GHz
Insertion Loss ^{*1} :	1.6dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider
	1W max. as combiner

[1] Excluding theoretical loss 6.0dB.


Mechanical

Size ^{*2} :	55*52*10mm
	2.165*2.047*0.394in
Weight:	80g
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole
[2] Exclude connectors.	

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

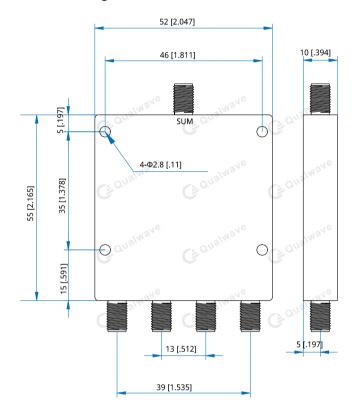

Unit: mm [in] Tolerance: ±0.3mm [±0.012in]

How To Order QPD4-2000-18000-20-S

Customization is available upon request.