



# **QASQS-B** SMA to Quick SMA

Features: Applications: \* Low VSWR \* Wireless

\* Transmitter

\* Laboratory Test

\* Radar

#### **Electrical**

Frequency: DC~18GHz

VSWR: 1.25 max.

 $\begin{array}{ll} \text{Impedance of Dielectric:} & 5000 \text{M}\Omega \text{ min.} \\ \text{Voltage Withstand:} & 1000 \text{V DC} \\ \text{Impedance:} & 50\Omega \end{array}$ 

#### Mechanical

RF Connectors: SMA

Quick SMA

Outer Conductor: Gold plated brass or

Gold plated beryllium copper

Dielectric: PTFE


Inner Conductor: Gold plated beryllium copper

### **How To Order**

QASQS-FM-B - SMA (f) to Quick SMA (m), Outline A
QASQSL-FM-B - SMA (f) to Quick SMA (m), flange mount, Outline

Customization is available upon request.

## **Outline Drawings**

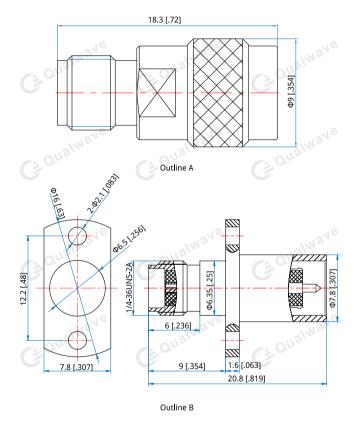

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]