

# QPD2-2000-12000-20-S

## 2-Way, 2~12GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	2~12GHz
Insertion Loss:	1dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	20W max.as divider 1W max. as combiner

### Mechanical


Size <sup>*1</sup> :	47*24*10mm 1.85*0.945*0.394in
Weight:	32g
Connectors:	SMA Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

### Outline Drawings

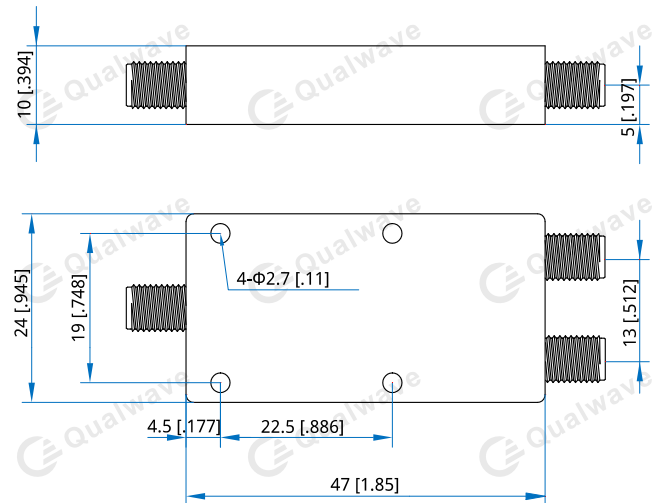

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

### How To Order

**QPD2-2000-12000-20-S**

Customization is available upon request.