

QC2-FL4G-P

2.4mm Connector, DC~50GHz

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~50GHz
VSWR:	1.15 max.
Impedance of Dielectric:	3000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	750V DC
Impedance:	50Ω


Mechanical

RF Connector:	2.4mm Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI & PTFE or PEI
Inner Conductor:	Gold Plated Beryllium Copper


Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

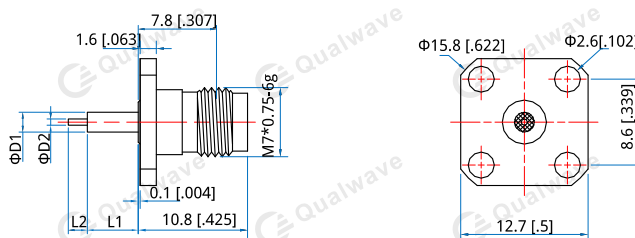

Part Number	ΦD1	ΦD2	L1	L2
QC2-FL4G-P30-01	1.67 [0.066]	0.3 [0.012]	1.4 [0.055]	1.5 [0.059]
QC2-FL4G-P30-02	1.67 [0.066]	0.3 [0.012]	3 [0.118]	1.5 [0.059]
QC2-FL4G-P60-03	2 [0.079]	0.6 [0.024]	6.35 [0.25]	1.27 [0.05]
QC2-FL4G-P60-04	2 [0.079]	0.6 [0.024]	5.1 [0.201]	1.9 [0.075]

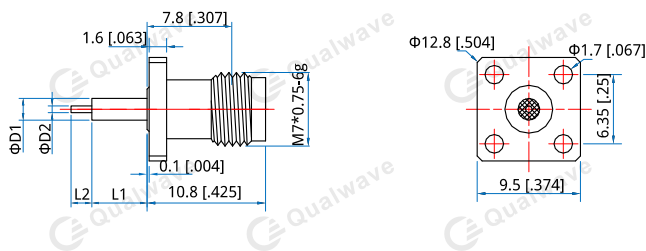

Part Number	ΦD1	ΦD2	L1	L2
QC2-FL4G-P30-05	1.67 [0.066]	0.3 [0.012]	1.4 [0.055]	1.5 [0.059]
QC2-FL4G-P30-06	1.67 [0.066]	0.3 [0.012]	3 [0.118]	1.5 [0.059]
QC2-FL4G-P60-07	2 [0.079]	0.6 [0.024]	6.35 [0.25]	1.27 [0.05]
QC2-FL4G-P60-08	2 [0.079]	0.6 [0.024]	5.1 [0.201]	1.9 [0.075]

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]