

QBF-23000-26500-60

23~26.5GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	23~26.5GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.8 max.
Stopband Attenuation:	60dBc@DC~21.3GHz min. 60dBc@28.5~40GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

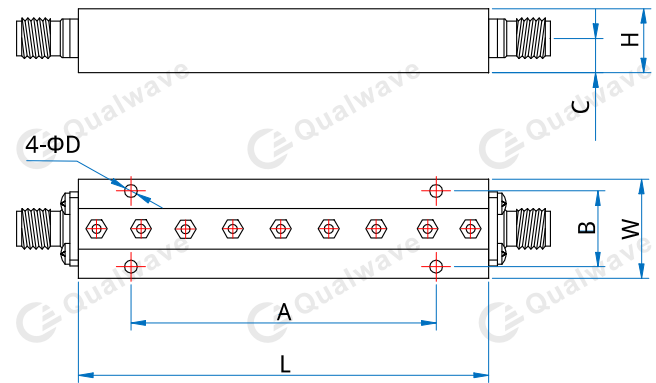

Size	L	W	H	A	B	C
mm	51.2	16	10.5	34.2	12	5.6
in	2.016	0.63	0.413	1.346	0.472	0.22

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-23000-26500-60

Customization is available upon request.