

QA3J

3.5mm to 7.0mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connectors: 3.5mm
7.0mm
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

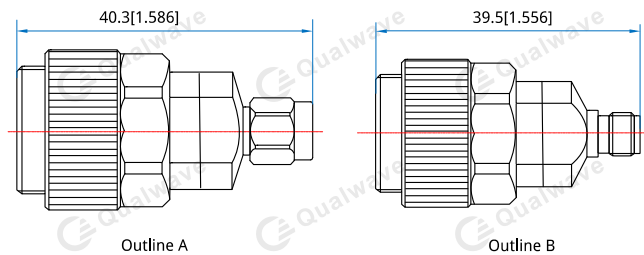

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

QA3J-M - 3.5mm(m) to 7.0mm, Outline A
QA3J-F - 3.5mm(f) to 7.0mm, Outline B

Customization is available upon request.