

## QPA-100-4000-60-20

0.1~4GHz, 60dB, 20dBm

**Features:**

- \* Small Size
- \* Low Power Consumption

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test

### Electrical

Frequency:	0.1~4GHz
Small Signal Gain:	60dB min.
Gain Flatness:	±3dB typ.
Output Power (P1dB):	20dBm typ.
Spurious:	-50dBc max. @DC~10GH
Input VSWR:	1.45 typ.
Output VSWR:	2 typ.
Voltage:	+5V DC
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	80*60*20mm 3.15*2.362*0.787in
RF Connectors:	SMA female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-10~+50°C
------------------------	-----------

### Outline Drawings

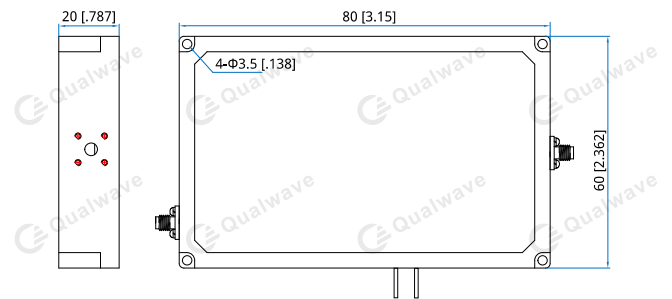

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QPA-100-4000-60-20**

Customization is available upon request.