

QPA-25000-28000-18-25

25~28GHz, 18dB, 25dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	25~28GHz
Gain:	18dB typ.
Output Power (P1dB):	25dBm min.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
VSWR:	2.0 typ.
Voltage:	+6V DC
Current:	1.0A typ.
Impedance:	50Ω

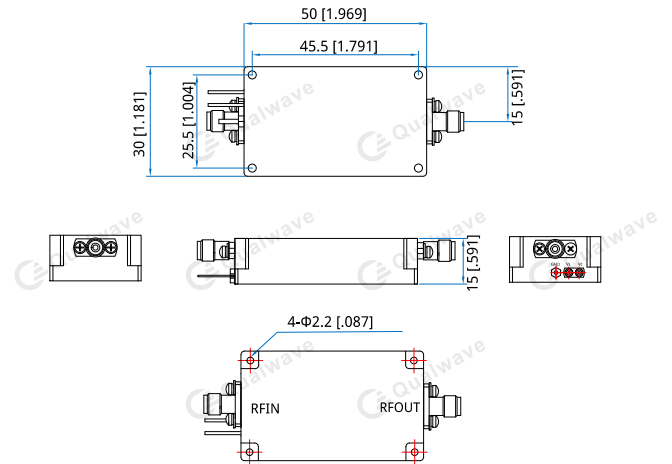
Mechanical

Size ^{*1} :	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ2.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QPA-25000-28000-18-25

Customization is available upon request.