

QWTS62-20

WR-62, 20W

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency: 11.9~18GHz
Average Power: 20W
VSWR: 1.2 max.


Mechanical

Waveguide Size: WR-62 (BJ140)
Flange: FBP140

Environmental

Temperature: -55~+125°C

Outline Drawings

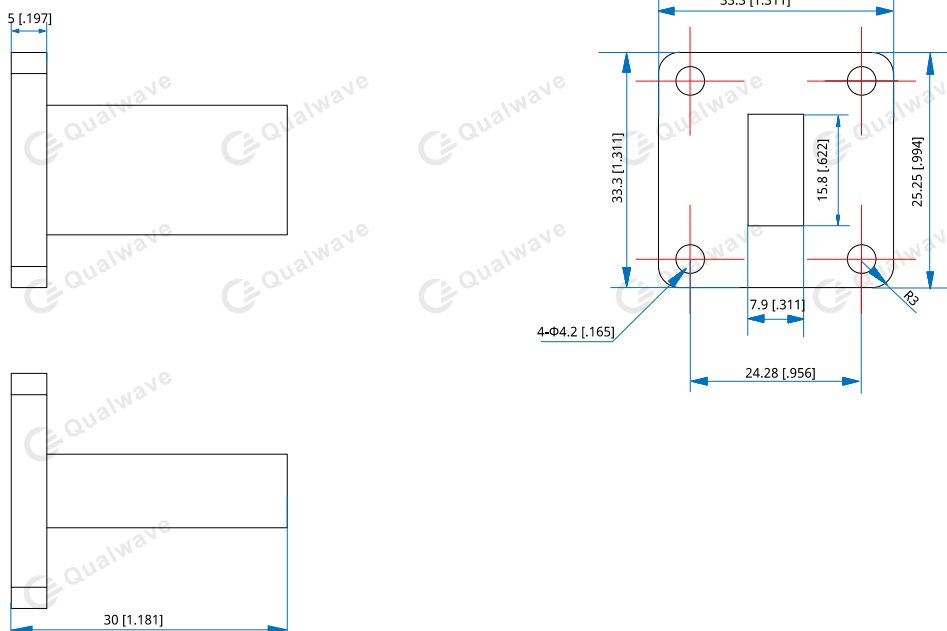

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWTS62-20-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

1 - FBP140 (Outline A)

Examples:

To order a small size waveguide termination, WR-62, 20W, Aluminum, FBP140, specify QWTS62-20-A-1.

Customization is available upon request.